

MONKEY PUMPS™

**MODEL
15**



SPIDER MONKEY



LESS WORK - MORE MONKEY

WWW.MONKEYPUMPS.COM



SPIDER MONKEY

FEATURES & BENEFITS

- One Motor; Five Plunger Sizes;
- 316 SS - Standard Construction;
- Adjustable Packing;
- Pneumatic / Gas Powered;
- No Lubrication Necessary;
- No Springs or Diaphragms in Motor

STATS

Strokes / Minute	4 - 105
Supply Range	20 - 150 psig
Stroke Length	1" or 1/2"
Weight	8 lbs.
Height	12 in.

WWW.MONKEYPUMPS.COM

PERFORMANCE BY PLUNGER

Plunger Diameter		1/8"	3/16"	1/4"	3/8"	1/2"
Injection Rate (us gal/day)	low	0.28	0.68	1.36	2.96	4.80
	high	8.16	17.45	33.12	78.96	135.12
Amplification Ratio		140	62	35	15	8
Max Allowable Discharge Pressure		2,000	2,000	2,000	2,000	1,312



MONKEY PUMPS™

ph (504) 394-7900 fx (504) 394-7373 spider@monkeypumps.com

MONKEY PUMPS™

MODEL
25



CHIMP

WWW.MONKEYPUMPS.COM

LESS WORK - MORE MONKEY



CHIMP



FEATURES & BENEFITS

**One Motor; Four Plunger Sizes;
 316 SS - Standard Construction;
 Adjustable Packing;
 Pneumatic / Gas Powered;
 No Lubrication Necessary;
 No Springs or Diaphragms in Motor**

STATS

Strokes / Minute	1 - 105
Supply Range	20 - 150 psig
Stroke Length	1" or 1/2"
Weight	11 lbs.
Height	12 in.

WWW.MONKEYPUMPS.COM

PERFORMANCE BY PLUNGER

Plunger Diameter		1/8"	3/16"	1/4"	3/8"	1/2"
Injection Rate (us gal/day)	low	0.07	0.17	0.34	0.74	1.20
	high	8.16	17.45	33.12	78.96	135.12
Amplification Ratio		399	176	99	43	24
Max Allowable Discharge Pressure		12,000	12,000	12,000	6,450	3,600



MONKEY PUMPS™

ph (504) 394-7900 fx (504) 394-7373 chimp@monkeypumps.com

MONKEY PUMPS™

MODEL
50



ORANGUTAN



WWW.MONKEYPUMPS.COM



ORANGUTAN



FEATURES & BENEFITS

- One Motor; Three Plunger Sizes;
- 316 SS - Standard Construction;
- Adjustable Packing;
- Pneumatic / Gas Powered;
- No Lubrication Necessary;
- No Springs or Diaphragms in Motor

STATS

Stroke / Minute	1-85
Supply Range	20-150 psig
Piston Diameter	5.00 in
Stroke Length	1" or 1/2"
Weight	20 lbs.
Height	13.25 in.

PERFORMANCE BY PLUNGER

Plunger Diameter		1/2"	3/4"	1"
Injection Rate (us gal/day)	low	1.50	3.00	5.00
	high	81.00	230.00	375.00
Power Amplification Ratio		99	43	24
Max Allowable Discharge Pressure		10,000	6,450	3,600



MONKEY PUMPS™

ph (504) 394-7900 fx (504) 394-7373 orangutan@monkeypumps.com

ZERO EMISSIONS.

Monkey Pumps offers the revolutionary

GREEN BANANA



Completely eliminates exhaust.
Environmentally friendly and economical.

Supply pressure up to **1,000 PSIG.**

Capture exhaust up to **900 PSIG.**

*The Baboon has supply up to 500 PSIG & exhaust capture up to 400 PSIG


Features

- **One** motor; **Three** piston sizes
- **316SS** Standard Construction
- **Ceramic Coated** Fluid End
- **Pneumatic; Gas Powered**
- **No Lubrication** necessary
- No **Springs** or **Diaphragms**
- **Zero Emission** model available

(Green Banana option)

Stats

- Strokes / Minute 4-20
- Supply Range 20-150 PSIG
- Stroke Length 4 inches
- Weight 40 lbs
- Dimensions 25" x 10" x 12"

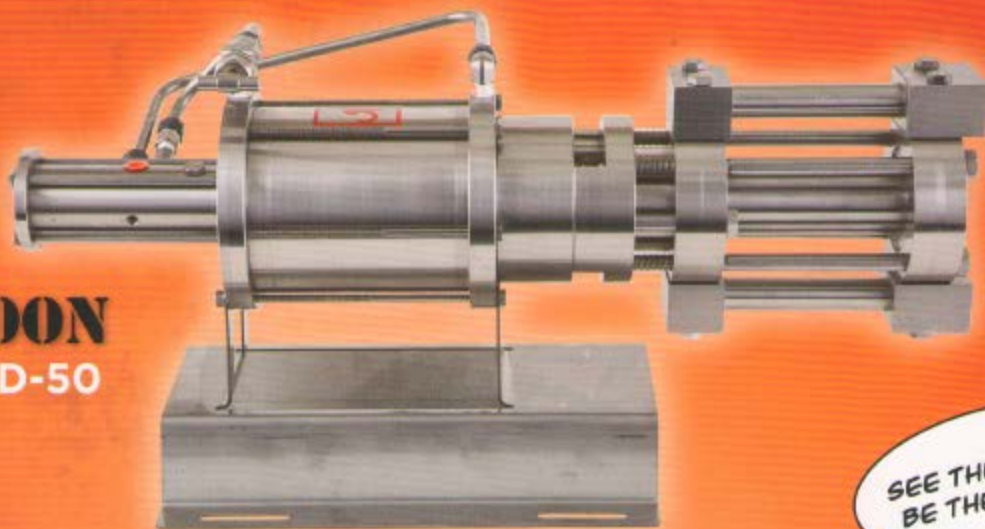

BABOON Model D-50

SEE THE BANANA.
BE THE BANANA.

Piston Diameter		1.0"	1.5"	2.0"
Injection Rate GPD	Low	135	335	610
	High	700	1,800	3,500
Max Discharge Pressure		3,600	1,500	900

